



Easy 10 Manual

Alimentazione a Gas

CODE: 925813150

Technical features

Outside dimension: 850 L x 915 P x 1260 H mm

Space between trays: 80 mm

Trays: 10T GN1/1 - 10T 40X60
Power: 16.5 kW - 14.197Kcal/h KW

Weight: 130 Kg Max temperature: 270 ° C

Power supply: 400 V ~ 3PH + N + PE | 400 V ~ 2PH + N + PE | 230 V ~ 3PH + PE | 230 V ~ 1PH + N +

PE | 50-60 Hz

Equipment

Controlled steam injection (%) Glass opening for cleaning Catalytic burner high performance
Fan inversion system Halogen lighting Unique pan support GN 1/1 - 40x60


2 Fan speeds Continuous operation INF Mechanical timer 0-120

Accessories


Exhaust & draining, Proofers, Cleaning & purification, Stands & supports, Trays



Easy 10 Manual Alimentazione a Gas

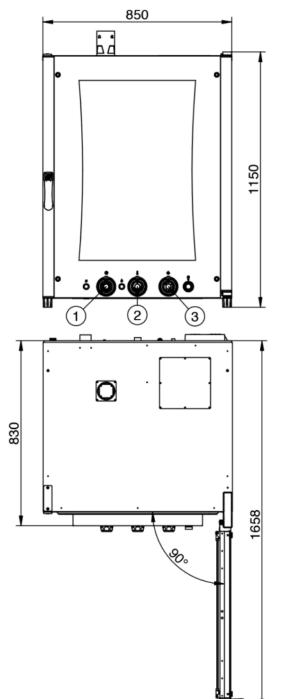

- 1 Manopola Timer Timer knob Poignée de la minuterie Mando del temporizador
- 2 Manopola temp. Temp. knob Poignée de la temp. Mando de la temp.
- 3 Manopola Umidità Humidity knob Poignée de l'humidité Mando humedad

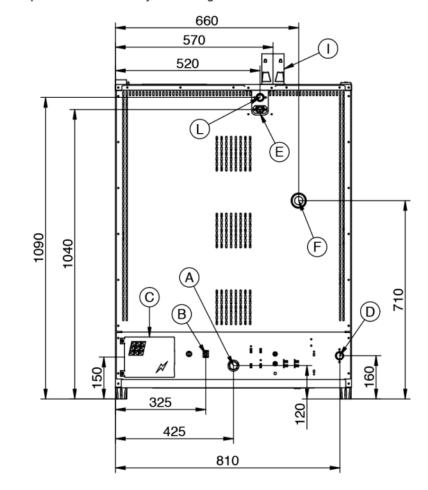

Legend


- A Drain liquid Ø 30mm
- B Equipotential terminal comb
- C Electric supply
- D Water inlet 3/4"
- E Extracting hood supply
- F Steam exhaust Ø 50mm
- G Ø 80mm Combustion chamber fumes exhaust
- H Gas supply inlet 3/4"






Easy 10 Manual Alimentazione a Gas

Connections

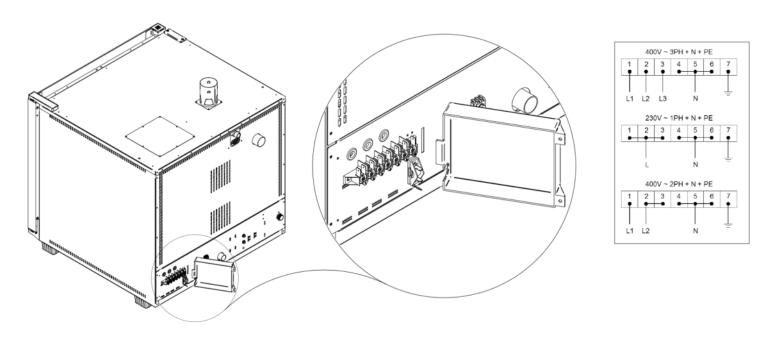

Packaging



Packing size:	920 L x 1000 P x 1400 H mm
Net weight:	117 Kg
Gross weight:	127 Ka